

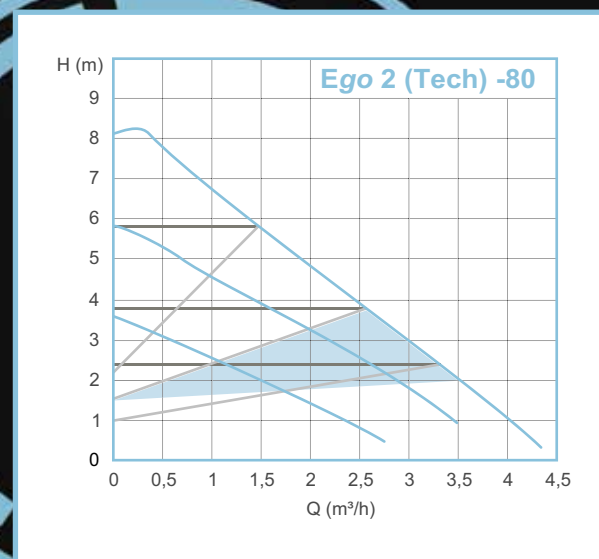


Technical features

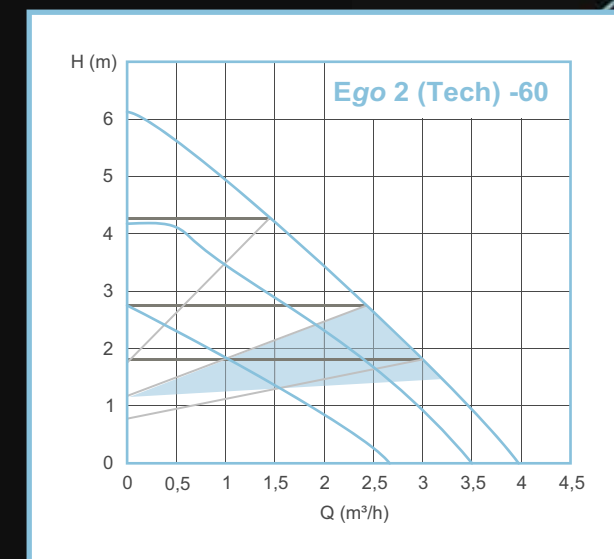

Technical data

Max. pressure:	10 bar
Liquid temperature:	-10 ÷ +110°C
Ambient temperature:	0 ÷ +40°C
Max. glycol quantity:	30%
Minimum suction pressure:	0,05 bar at 50°C 0,4 bar at 80°C 1,1 bar at 110°C
Insulation class:	F
Protection degree:	IP44
Voltage:	Single phase 1~230V

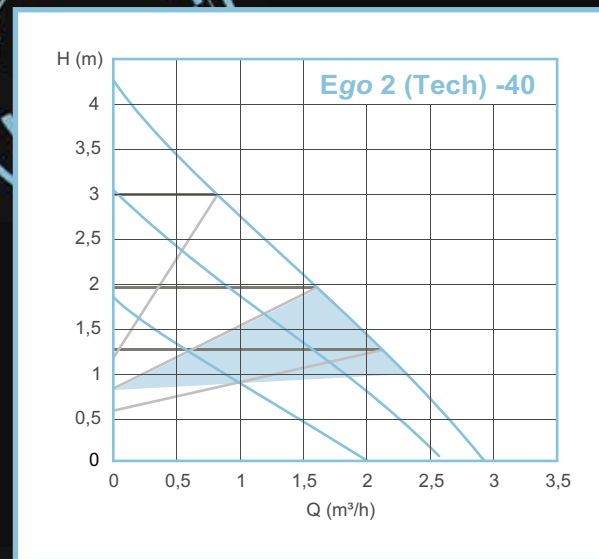

— Auto mode
 - - - Constant pressure
 · · · Fixed speed
 - · - · Proportional pressure



EBARA Pumps Europe S.p.A.
 Via Torri di Confine 2/1 int. C
 36053 Gambellara (Vicenza), Italy
 Phone +39 0444 706811
 Fax +39 0444 405811
 ebara_pumps@ebaraeurope.com
 www.ebaraeurope.com

EBARA Corporation
 11-1, Haneda Asahi-cho, Ota-ku,
 Tokyo 144-8510
 Japan
 Phone +81 3 6275 7598
 Fax +81 3 5736 3193
 www.ebara.com



479705648 02/20

Looking ahead,
going beyond expectations
Ahead Beyond



New Ego 2 and Ego 2 Tech circulators

Product Catalogue



A further step forward

The Ego range evolves and becomes even more efficient thanks to the new circulators Ego 2 and Ego 2 Tech.
The new Ego 2 and Ego 2 Tech offer:

- The best efficiency index in their category
- New motor technology as already used for Ego Easy and Ego Slim
- Compactness and lightness thanks to new design
- New display for better management and visualisation of operating parameters
- New operating modes
- Simple installation
- 5 years warranty

- Constant pressure
- Proportional pressure
- Fixed speed
- Auto mode
- Night mode



Ego 2



- Operating mode:**
- Proportional pressure
 - Constant pressure
 - Fixed speed



Ego 2 Tech



- Operating mode:**
- Proportional pressure
 - Constant pressure
 - Fixed speed
 - Auto mode
 - Night mode

- 4 viewable parameters:**
- Power (W)
 - Head (m)
 - Flow (m³/h)
 - Error occurred

